

SPECIFICATION

△MECHANICAL

Operation Force : 160±50gf <TJ-416>

Stroke : 0.2±0.1mm

Operation Temperature Range : -20°C to +70°C

Storage Temperature Range : -30°C to +80°C

△ELECTRICAL

Electrical Life : 200,000 cycles.

50 mA, 12 VDC

Contact Resistance : 100 mΩ max.

Insulation Resistance : 100MΩ min. at 500 VDC

Dielectric Strength: 350 VAC/1 minute

Contact Arrangement : 1 pole 1throw

MATERIAL

△BASE : UL 94V-0 LCP High-Temp Thermoplastic.

Color : Black

△CONTACT : Stainless steel with silver cladding.

△TERMINAL : Phosphor bronze with silver cladding.


△TAPE : Kapton.

SOLDERING PROCESS

△HAND SOLDERING : Use a soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder.


△REFLOW SOLDERING : Vapor phase & reflow soldering can be applied.

△Temperature Profile :

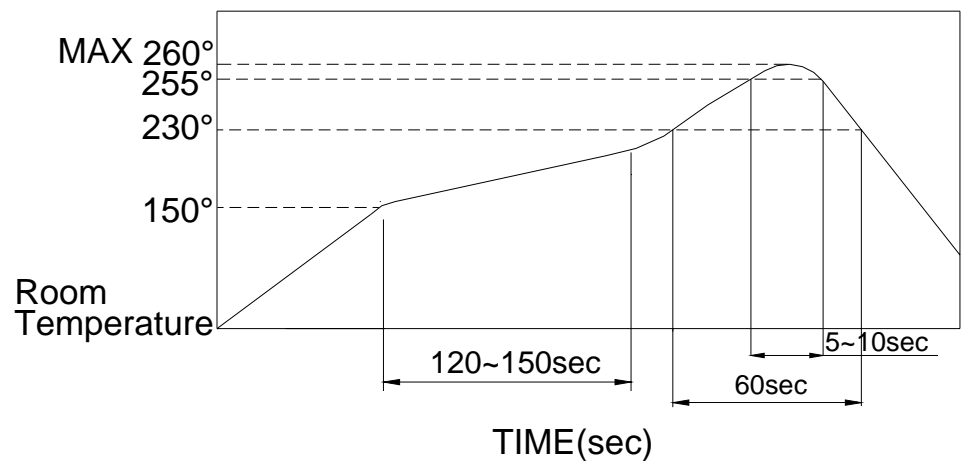

PACKING

Part Number	Number Per Tube	Number Per Reel
TJ-4	-	8000

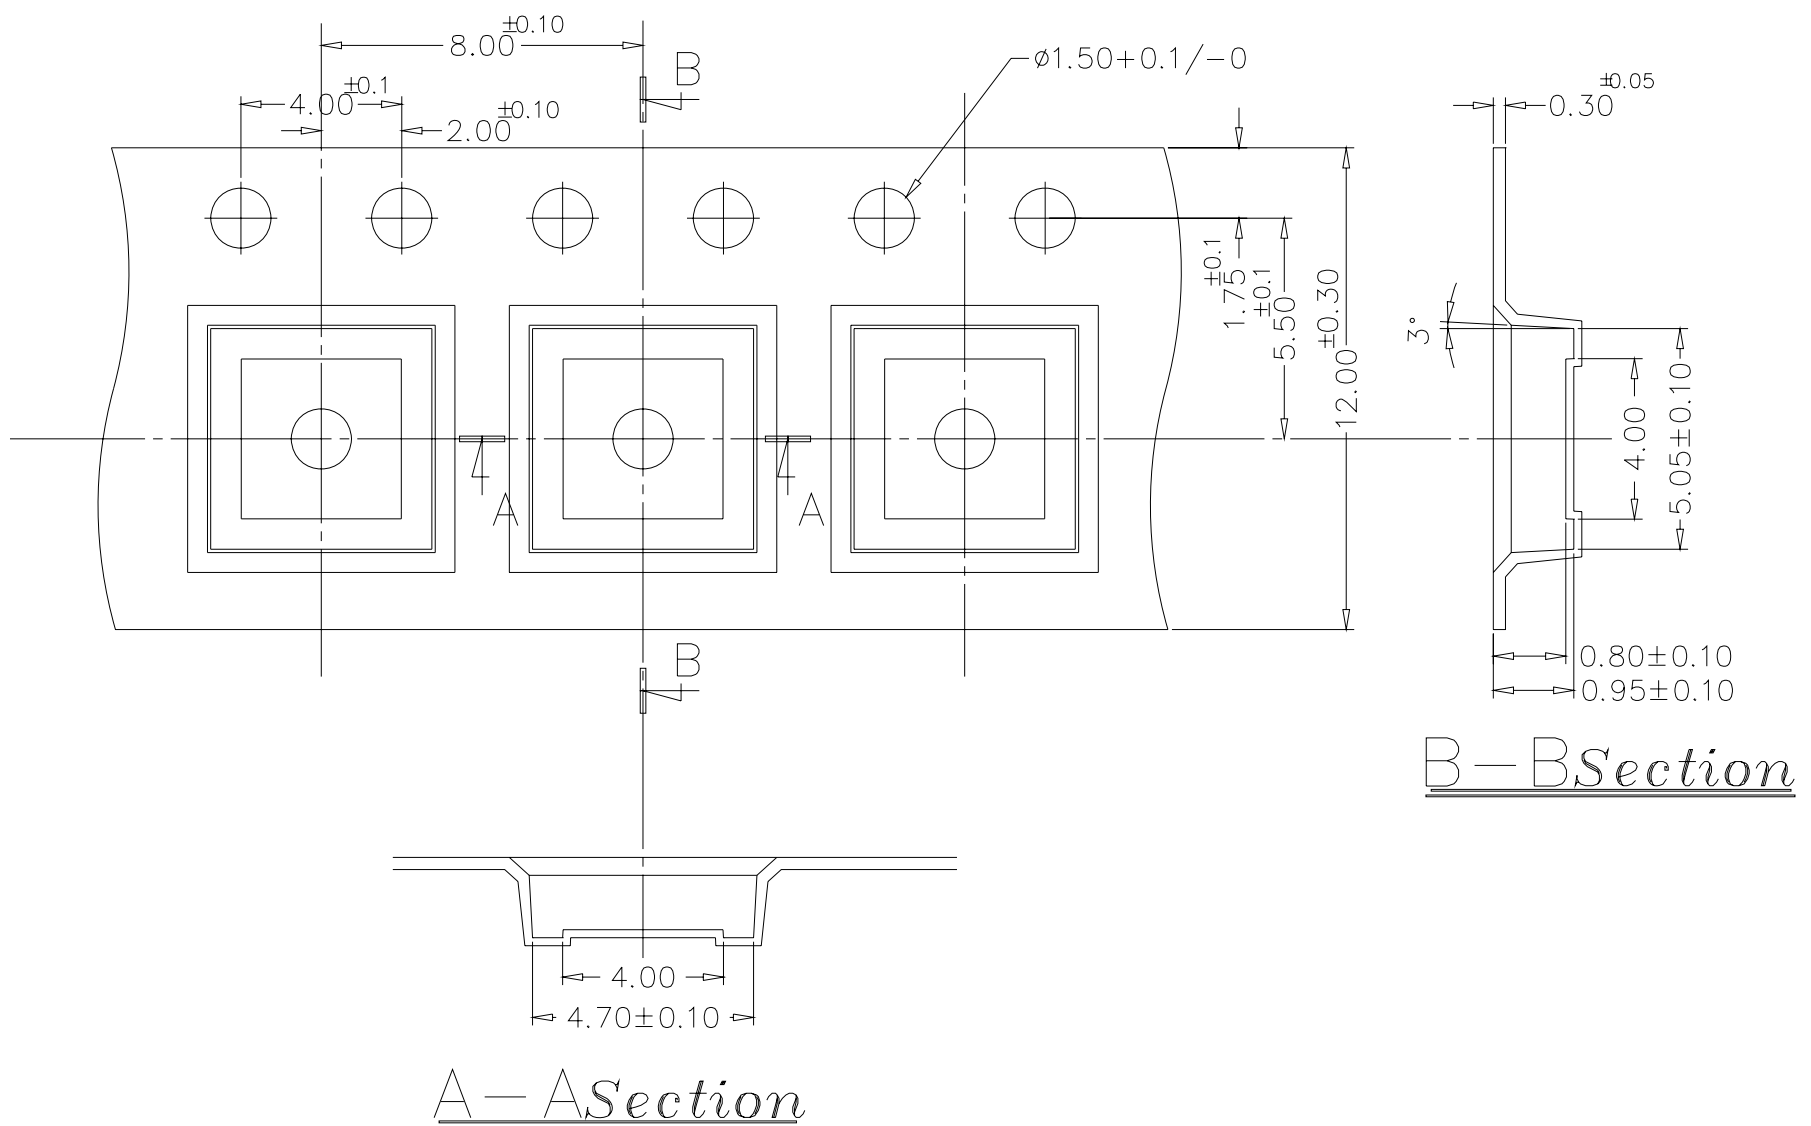

General Tolerance : ±0.1mm