

TRIGGER SWITCH

SPECIFICATIONS

- Contact Rating : 20.5A 24VDC
- Contact Resistance : 5mΩ (MAX)
- Insulation Resistance : 500 MΩ 500V DC (MIN)
- Dielectric Strength : 1500V AC-1minute
- Electric Life : 50,000 cycles
- Operating Force : 2500 ± 300 gram


PART NO TG09



APPLICATIONS&FEATURES

- Standard & customer design
- Power tools
- Single pole single throw
- With brake

PART NUMBERING SYSTEM

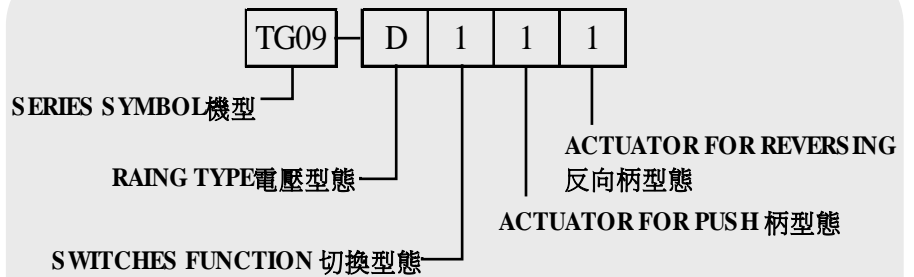

DIMENSIONS in mm

