

# TRIGGER SWITCH

## SPECIFICATIONS

- Contact Rating : 3(3)A 250VAC
- Contact Resistance : 20mΩ (MAX)
- Dielectric Strength : 1500V AC-1minute
- Insulation Resistance : 500 MΩ (MIN)
- Electric Life : 50,000 cycles
- Operating Force : 3500 gram (MAX)
- Travel : 7.5mm


## PART NO TG10





## APPLICATIONS&FEATURES

- Strong reliable construction
- Various speed
- Standard & customer design
- Power tools
- Safety lock button
- Single pole single throw

## PART NUMBERING SYSTEM

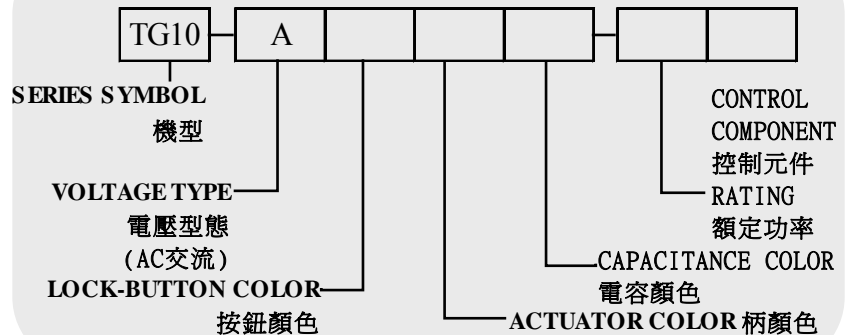

## DIMENSIONS in mm

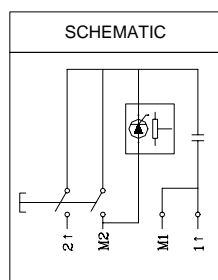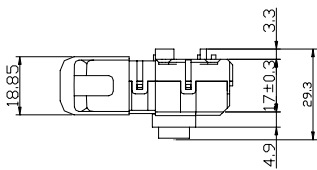

### LOCK-BUTTON COLOR

1	NONE
2	BLACK
3	RED

### ACTUATOR COLOR

1	BLACK
2	RED

### CAPACITANCE COLOR

NONE	YELLOW
1	BLACK

### CONTROL COMPONENT

NONE	NONE
1	SCR
2	TRIAC

### RATING

A	3(3) 250 VAC
B	4(4) 250 VAC
C	6(6) 125 VAC
D	4(4) 250VAC ,8A 125VAC

