
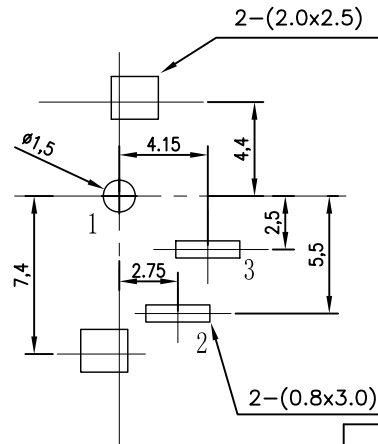


线路板开孔尺寸
P.C.B LAYOUT

按点示意图
SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 50\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-25N;
6. life test: 5,000 cycles.

5	HOUSING	1	PBT	
4	COVER	1	PF	
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING	1	STAINLESS STEEL	Ag-Plating
1	PIN	1	BRASS	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

TACLEX TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ± 0.30 ANGULAR: $\pm 3^\circ$	SIGNATURES		DATE	TITLE
	DRAWN	Amy	2005.01.11	DC POWER JACK
	CHK'D	Alex	2005.01.11	NO.
REVISIONS A	SCALE 5/1	APPV'D Rex	2005.01.11	TDJ-A106D

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED