


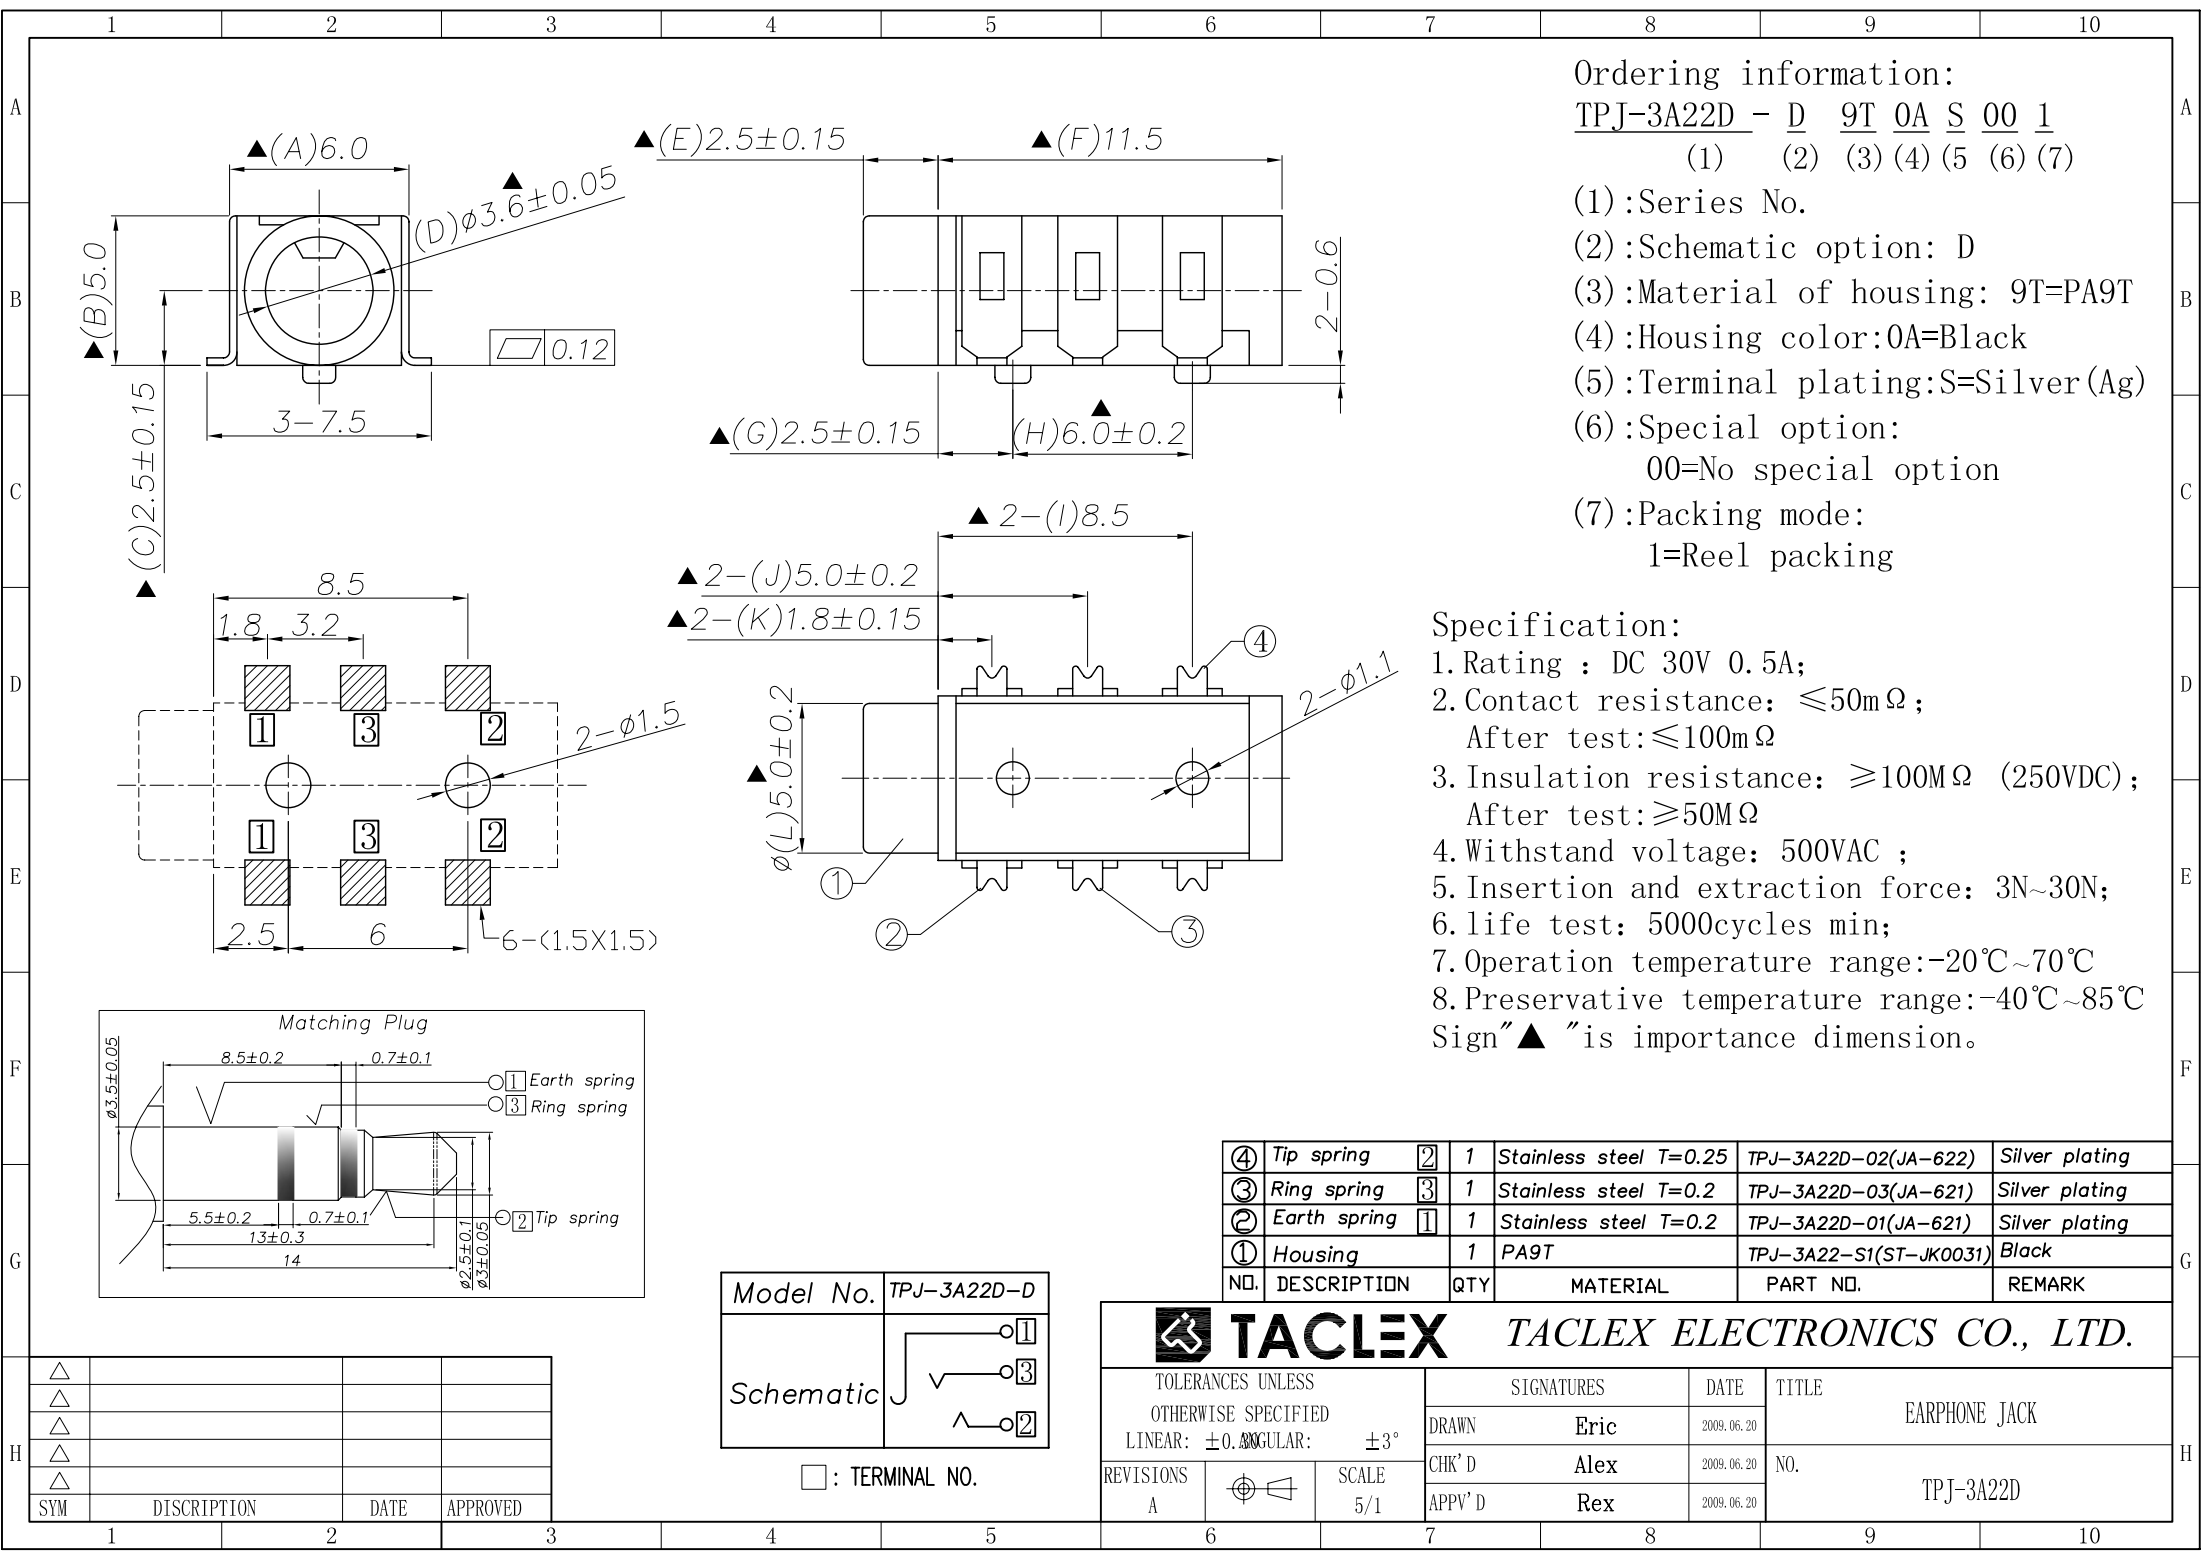

Ordering information:
TPJ-3A22D - D 9T 0A S 00 1
(1) (2) (3) (4) (5) (6) (7)
(1):Series No.
(2):Schematic option: D
(3):Material of housing: 9T=PA9T
(4):Housing color:0A=Black
(5):Terminal plating:S=Silver (Ag)
(6):Special option:
00=No special option
(7):Packing mode:
1=Reel packing

Specification:
1.Rating : DC 30V 0.5A;
2.Contact resistance: $\leq 50m\Omega$;
After test: $\leq 100m\Omega$
3.Insulation resistance: $\geq 100M\Omega$ (250VDC);
After test: $\geq 50M\Omega$
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3N~30N;
6.life test: 5000cycles min;
7.Operation temperature range:-20℃~70℃
8.Preservative temperature range:-40℃~85℃
Sign"▲ "is importance dimension.

④	Tip spring	2	1	Stainless steel T=0.25	TPJ-3A22D-02(JA-622)	Silver plating
③	Ring spring	3	1	Stainless steel T=0.2	TPJ-3A22D-03(JA-621)	Silver plating
②	Earth spring	1	1	Stainless steel T=0.2	TPJ-3A22D-01(JA-621)	Silver plating
①	Housing	1	PA9T		TPJ-3A22-S1(ST-JK0031)	Black
NO.	DESCRIPTION	QTY		MATERIAL	PART NO.	REMARK

Model No.	TPJ-3A22D-D
Schematic	

□ : TERMINAL NO.

		TACLEX ELECTRONICS CO., LTD.			
TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE	TITLE
LINEAR: ± 0.30 ANGULAR: $\pm 3^\circ$		DRAWN	Eric	2009.06.20	EARPHONE JACK
REVISIONS		CHK'D	Alex	2009.06.20	NO.
A		APPV'D	Rex	2009.06.20	TPJ-3A22D
		SCALE			
		5/1			

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED