

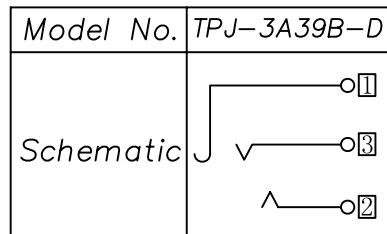


P. C. B Layout
(Copper-sided view)

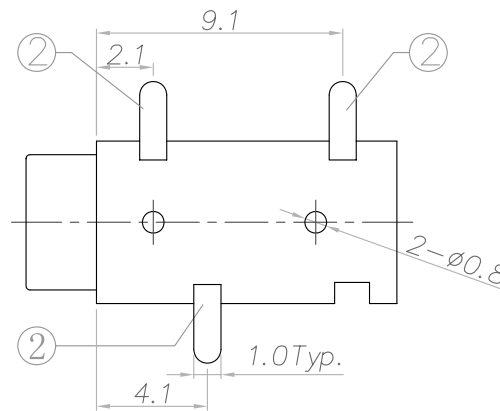

□ : TERMINAL NO.

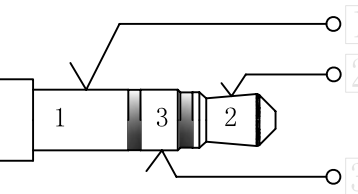

Ordering information:
 TPJ-3A39B-□ □ □ □ □ □ □ □
 (1) (2) (3) (4) (5) (6) (7)

(1):Series No
 (2):Schematic option: D
 (3):Material of housing:
 9T=PA9T
 (4):Housing color:
 0A=Black 1_=Brown 2_=Red
 3_=Orange 4_=Yellow 5_=Green
 6_=Blue 7_=Purple 8_=Gray
 9_=White
 (5):Terminal plating
 S:Silver(Ag)
 (6):Special option:
 00:No special option
 (7):Packing mode:
 1.Reel packing

SPECIFICATION

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: ≤30mΩ;
- 3.Insulation resistance: ≥100MΩ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-25N;
- 6.life test: 5,000 cycles.

②	Earth spring	1&2&3	3	Phosphor bronze	TPJ-3A39B-01(A-JK0082)	Ag-Plating
①	Housing		1	PA9T UL94 V-0	TPJ-3A39B-SI(ST-JK0046)	
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING	

TACLEX TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.03 ANGULAR: ±3°		SIGNATURES		DATE	TITLE
REVISIONS			SCALE	EARPHONE JACK	
A		5/1	DRAWN Eric		2009.03.16
			CHK'D Alex		2009.03.16
			APPV'D Rex		2009.03.16
				NO.	TPJ-3A39B

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED
1			
2			
3			