

- SPECIFICATION
- 1.Rating : DC 30V 0.5A;
  - 2.Contact resistance: ≤30mΩ;
  - 3.Insulation resistance: ≥100MΩ (DC250V);
  - 4.Withstand voltage: 500VAC ;
  - 5.Insertion and extraction force: 3–25N;
  - 6.life test: 5000 cycles.

### Ordering information:

TPJ-2A260-□ 9T □□ G 00 1  
(1) (2) (3) (4) (5) (6) (7)

(1):Series No

(2):Schematic option:J,M

(3):Material of housing:  
9T=PA9T

(4):Housing color:

0A=Black    2\_=Red    3\_=Orange  
4\_=Yellow    5\_=Green    6\_=Blue  
7\_=Purple    8\_=Gray    9\_=White

(5):Terminal plating:


G=Gold(Au)

(6):Special option:

00=No special option

(7):Packing mode:

1=Reel packing

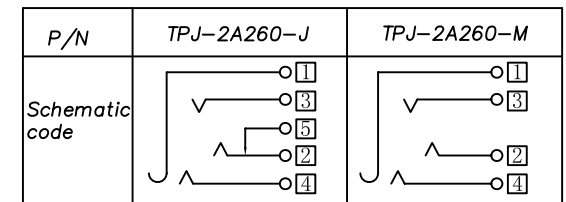

□: Terminal NO.

⑥	Shunt terminal	⑤	1	Brass T=0.20	TPJ-2A260-05(WP-686)	Gold flash
⑤	Ring spring	④	1	Phosphor bronze T=0.25	TPJ-2A260-04(JA-688)	Gold flash
④	Ring spring	③	1	Phosphor bronze T=0.20	TPJ-2A260-03(JA-689)	Gold flash
③	Tip spring	②	1	BeCu T=0.20	TPJ-2A260-02(TP-687)	Gold flash
②	Earth spring	①	1	Phosphor bronze T=0.20	TPJ-2A260-01(JA-690)	Gold flash
①	Housing		1	PA9T,UL94 V-0	TPJ-2A260-S1(ST-685)	
NO.	DESCRIPTION	QTY	MATERIAL		PART NO.	PLATING



**TACLEX**

**TACLEX ELECTRONICS CO., LTD.**

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: $\pm 0.003$ ANGULAR: $\pm 3^\circ$			SIGNATURES		DATE	TITLE EARPHONE JACK
			DRAWN Bingo		2009.04.24	
			CHK' D Alex		2009.04.24	NO. TPJ-2A260
			APPV' D Rex		2009.04.24	
REVISIONS		SCALE				
A		5/1				

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED