
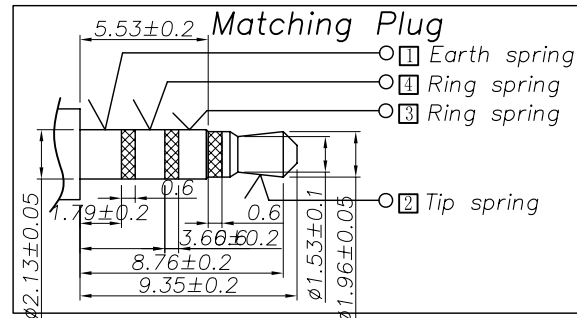
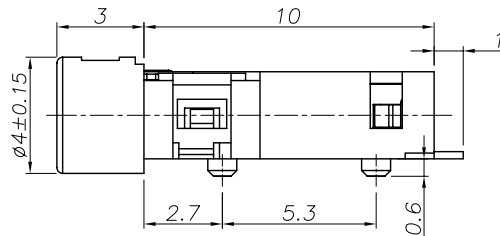




1 2 3 4 5 6 7 8 9 10

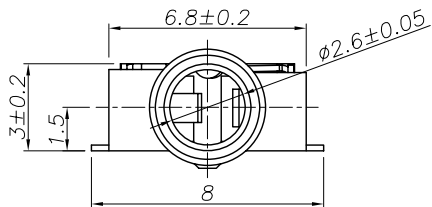


Ordering information:

TPJ-2A360 - M 9T 0A □ 00 1
(1) (2) (3) (4) (5) (6) (7)

- (1): Series No.
(2): Schematic option: M
(3): Material of housing:
9T=PA9T
(4): Housing color:
Zero 0A=Black
(5): Terminal plating
G=Gold (Au) S=Silver (Ag)
(6): Special option:
00=No special option
(7): Packing mode:
1=Tape reel packing

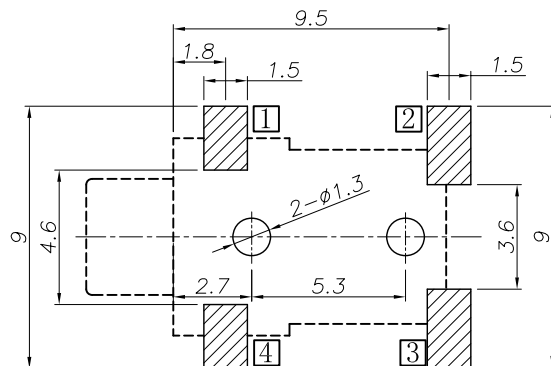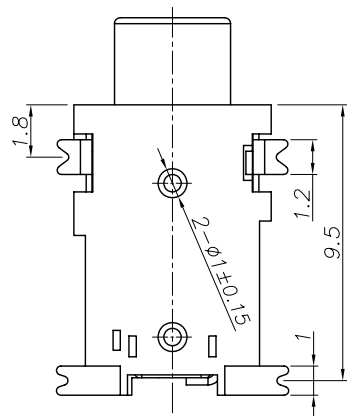

P. C. B Layout
(Copper-sided view)

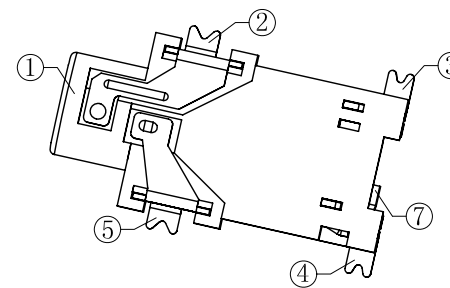

Model No.	TPJ-2A360-M
Schematic code	

□: Terminal No.

SPECIFICATION

- Rating : DC 30V 0.5A;
- Contact resistance: $\leq 50\text{m}\Omega$;
- Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3-25N;
- life test: 5000 cycles.

⑦	Assistant terminal	1	Brass 0.25t	TPJ-2A370-07	Gold/Silver Plating	
⑥						
⑤	Ring spring	④	1	Stainless steel 0.2t	TPJ-2A360-04	Gold/Silver Plating
④	Ring spring	③	1	Beryllium copper 0.25t	TPJ-2A370-03	Gold/Silver Plating
③	Tip spring	②	1	Phosphor bronze 0.25t	TPJ-2A370-02	Gold/Silver Plating
②	Earth spring	①	1	Stainless steel 0.2t	TPJ-2A360-01	Gold/Silver Plating
①	Housing		1	PA9T,UL94 V-0	TPJ-2A360-S1	
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING	



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: $\pm 0.1\text{mm}$ ANGULAR: $\pm 3^\circ$		SIGNATURES		DATE	TITLE
		DRAWN Andy		2009.07.08	EARPHONE JACK
		CHK'D Alex		2009.07.08	NO.
REVISIONS A		SCALE 5/1	APPV'D Rex		2009.07.08

TPJ-2A360

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED