


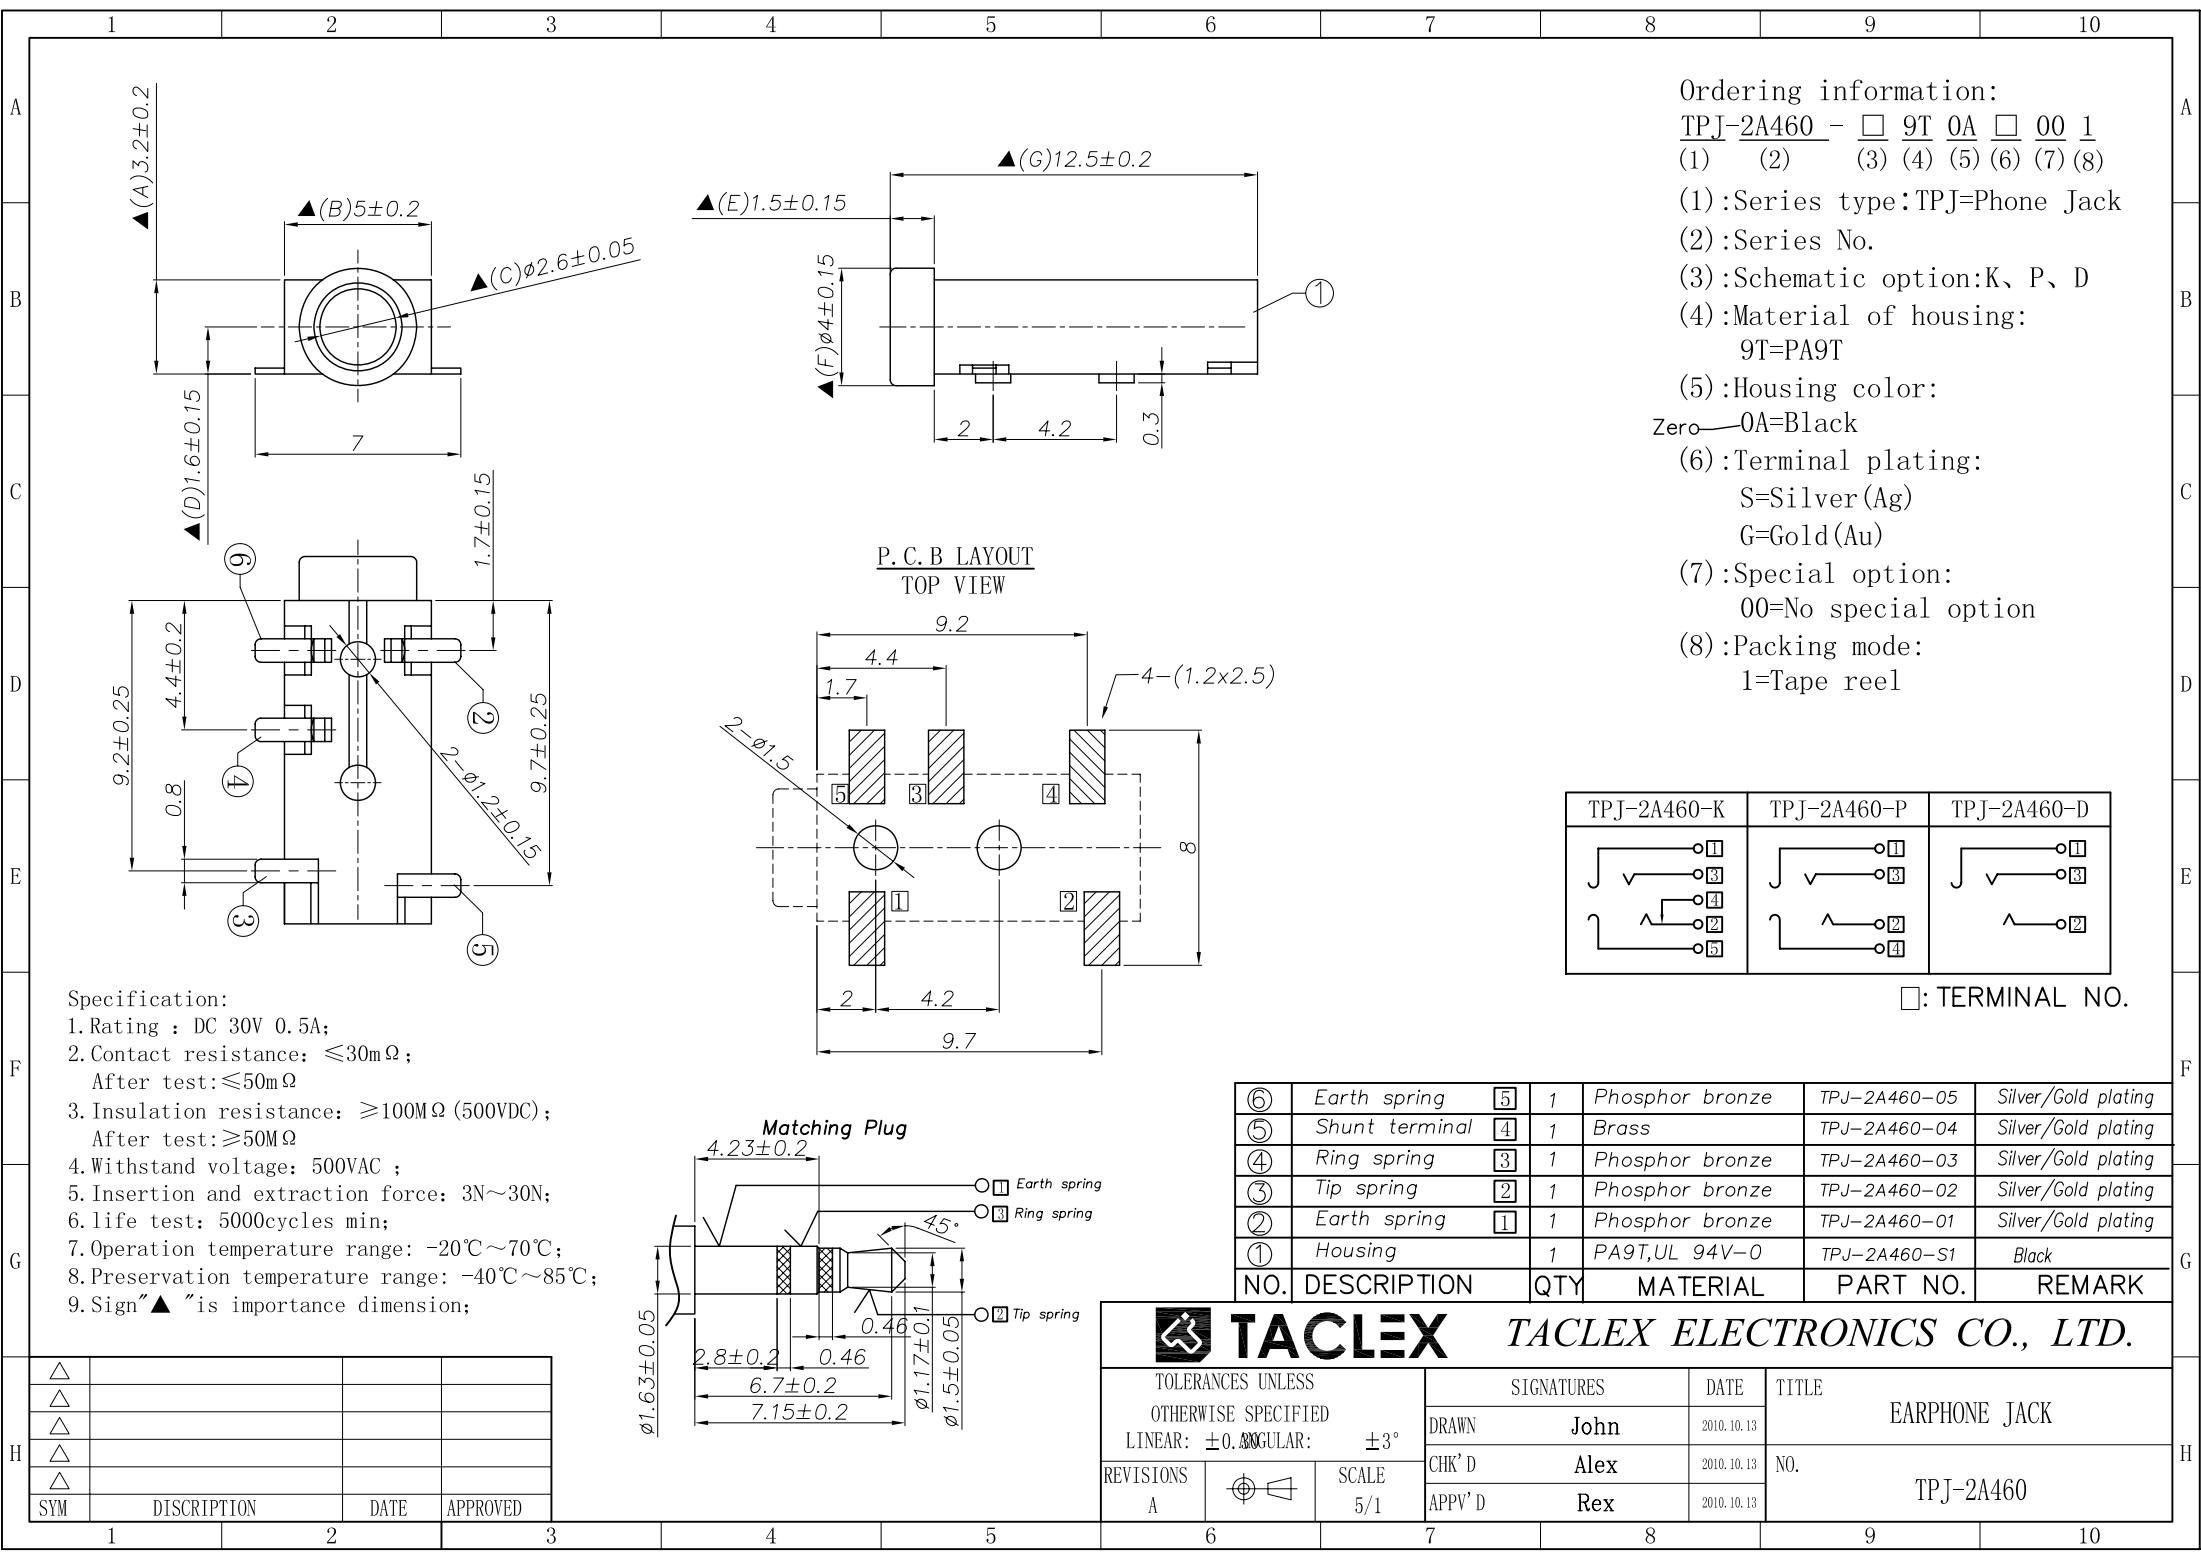

Ordering information:
TPJ-2A460 - □ 9T 0A □ 00 1
(1) (2) (3) (4) (5) (6) (7) (8)
(1):Series type:TPJ=Phone Jack
(2):Series No.
(3):Schematic option:K、P、D
(4):Material of housing:
9T=PA9T
(5):Housing color:
Zero—0A=Black
(6):Terminal plating:
S=Silver(Ag)
G=Gold(Au)
(7):Special option:
00=No special option
(8):Packing mode:
1=Tape reel

TPJ-2A460-K	TPJ-2A460-P	TPJ-2A460-D

□: TERMINAL NO.

Specification:
1. Rating : DC 30V 0.5A;
2. Contact resistance: ≤30mΩ;
After test:≤50mΩ
3. Insulation resistance: ≥100MΩ (500VDC);
After test:≥50MΩ
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3N~30N;
6. life test: 5000cycles min;
7. Operation temperature range: -20℃~70℃;
8. Preservation temperature range: -40℃~85℃;
9. Sign"▲ "is importance dimension;

⑥	Earth spring	⑤	1	Phosphor bronze	TPJ-2A460-05	Silver/Gold plating
⑤	Shunt terminal	④	1	Brass	TPJ-2A460-04	Silver/Gold plating
④	Ring spring	③	1	Phosphor bronze	TPJ-2A460-03	Silver/Gold plating
③	Tip spring	②	1	Phosphor bronze	TPJ-2A460-02	Silver/Gold plating
②	Earth spring	①	1	Phosphor bronze	TPJ-2A460-01	Silver/Gold plating
①	Housing			PA9T,UL 94V-0	TPJ-2A460-S1	Black
NO.	DESCRIPTION	QTY		MATERIAL	PART NO.	REMARK

TACLEX TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.005 ANGULAR: ±3°		SIGNATURES		DATE	TITLE EARPHONE JACK
		DRAWN	John	2010.10.13	
		CHK'D	Alex	2010.10.13	
REVISIONS A		SCALE 5/1	APPV'D Rex	2010.10.13	NO. TPJ-2A460

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED