
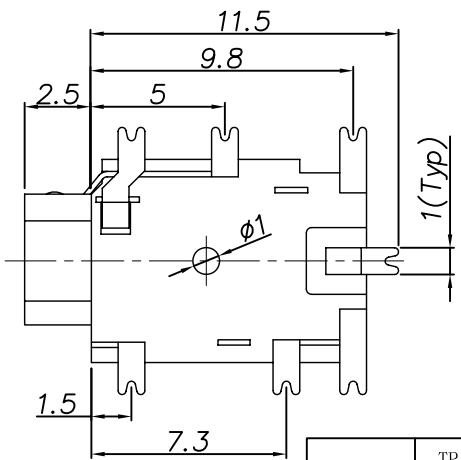


Ordering information:
TPJ-2A600 -
 (1) (2) (3) (4) (5) (6) (7)
 (1): Series No.
 (2): Schematic option:
 U, R, W, K, I, J, M
 (3): Material of housing:
 9T=PA9T
 (4): Bushing or Housing color:
 0A=Black 2_=Red 3_=Orange
 4_=Yellow 5_=Green 6_=Blue
 (5): Terminal plating
 S: Silver (Ag) T: Tin (Sn)
 G: Gold (Au)
 (6): Special option:
 00: No special option
 (7): Packing mode:
 1: Tape reel packing
 3: Plastic box packing
 4: Bag packing

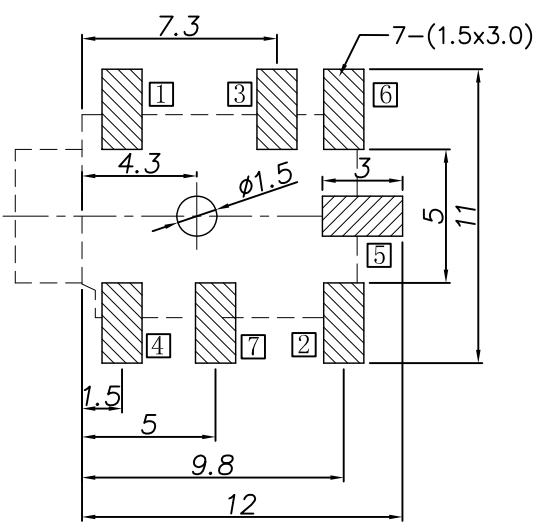

P. C. B Layout
(Copper-sided view)

Model No.	TPJ-2A600-U	TPJ-2A600-R	TPJ-2A600-W	TPJ-2A600-K	TPJ-2A600-I	TPJ-2A600-J	TPJ-2A600-M
Schematic code							

Circuit Diagram : Terminal No. : Item No.

SPECIFICATION
 1. Rating : DC 30V 0.5A;
 2. Contact resistance: ≤30mΩ;
 3. Insulation resistance: ≥100MΩ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-25N;
 6. life test: 5000 cycles.

⑧	Earth terminal	1	C5210-H T=0.2	PJ20510-07(JA-1345)	Au-Plating
⑦	Shunt terminal	1	C2680-EH T=0.2	PJ20510-06(WP-1342)	Au-Plating
⑥	Shunt terminal	1	C2680-EH T=0.2	PJ20510-05(WP-1340)	Au-Plating
⑤	Ring spring	1	C5210-SH T=0.2	PJ20510-04(JA-1344)	Au-Plating
④	Ring spring	1	C5210-EH T=0.2	PJ20510-03(TP-1343)	Au-Plating
③	Tip spring	1	C5210-EH T=0.2	PJ20510-02(TP-1341)	Au-Plating
②	Earth spring	1	C5210-H T=0.2	PJ20510-01(ZT-1339)	Au-Plating
①	Housing	1	PA9T,UL94 V-0	PJ20510-S1(ST-1338)	Black
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING

TACLEX TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.000 ANGULAR: ±3°		SIGNATURES		DATE	TITLE
REVISIONS A		DRAWN Michael		2008.08.07	EARPHONE JACK
SCALE 5/1		CHK'D Alex		2008.08.07	
		APPV'D Rex		2008.08.07	
				NO.	TPJ-2A600

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED