

**SUGGESTED PCB LAYOUT
TOP VIEW**


Electrical Characteristics :

Insulation Resistance : 100MΩ [Min.
Contact Resistance : 50mΩ [Max.
Withstand Voltage : 100 VAC 1 minute.
Current Rating : 500mA

Material:

Housing : Thermoplastic UL94V-0
Contact : Selective Gold Plating
Terminal: 0.30mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.
Shield : Brass, Nickel Plating.

PART NO : CZ88B - B * 1 0 - L2

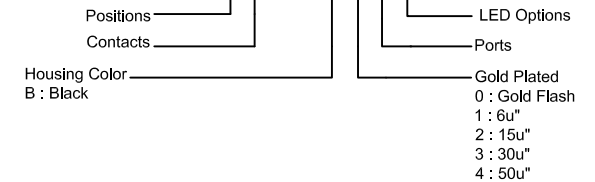

△			
△			
△			
△			
△			
△			
SYM	DISCIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS
OTHERWISE SPECIFIED
LINEAR: ±0.30 ANGULAR: ±3°

SIGNATURES

DATE

TITLE

DRAWN

Andy

2008.12.25

RJ45 JACK SINK

CHK'D

Alex

2008.12.25

NO.

APPV'D

Rex

2008.12.25

CZ88B-Bx10-L2

REVISIONS

A



SCALE

5/1