






- Electrical Characteristics :
- Insulation Resistance : 100M Ω Min.
 - Contact Resistance : 50m Ω Max.
 - Withstand Voltage : 100 VAC 1 minute.
 - Current Rating : 1.0A

Housing : Thermoplastic UL94V-0
Contact : Selective Gold Plating
Terminal : 0.25mm Thickness Copper Alloy
Plated With Gold And Tin In Solder Area.
Shell : Alloy,Nickel Plated On The All Area

POSITIONS
 Positions
 Contacts
 Housing Color
 B : Black

PORTS
 Ports
 LED Options
 Gold Plated
 0 : Gold Flash
 1 : 6u"
 2 : 15u"
 3 : 30u"
 4 : 50u"

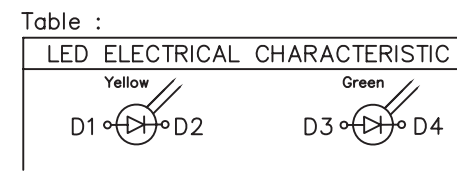

△			
△			
△			
△			
△			
SYM	DISCRPTION	DATE	APPROVED



TACLEX ELECTRONICS CO., LTD.

RJ45 JACK WITH LED

HG88KB2-Bx11