


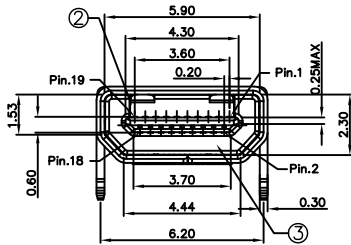




NO.	NAME	MATERIAL	PLATING
1	SHELL	Copper Alloy	Nickel Plated
2	TOP INSULATOR	THERMOPLASTIC	
3	BOTTOM INSULATOR	THERMOPLASTIC	
4	BOTTOM CONTACT	Copper Alloy	Tin-Gold Plated
5	TOP CONTACT	Copper Alloy	Tin-Gold Plated



THD-S60M2 B - L * *

Series _____
 Type _____
 Color _____
 B: Black
 Material _____
 L: LCP

Shell
 H : Nickel Plated
 A : Black Nickel Plated
 Gold Plated
 0 : Gold Flash
 1 : 5u"
 2 : 15u"
 3 : 30u"

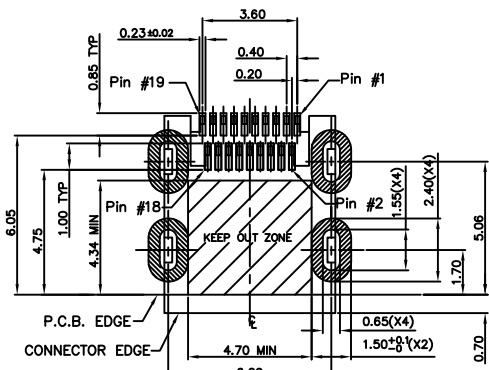

RECOMMENDED PCB LAYOUT
 TOP VIEW
 TOLERANCE:±0.05mm
 PCB THICKNESS: 0.80±0.05mm

△			
△			
△			
△			
△			
SYM	DISCIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR:±0.30 ANGULAR: ±3°		SIGNATURES		DATE	TITLE
		DRAWN	Andy	2011.01.28	HDMI D TYPE SMT
		CHK'D	Alex	2011.01.28	NO.
REVISIONS	A	SCALE	5/1	2011.01.28	THD-S60M2