


PANEL CUT-OUT

SPECIFICATION

- A: MATERIAL:
 1. HOUSING: PC, UL 94V-0
 2. TERMINAL: COPPER ALLOY, TIN PLATED
- B: CHARACTERISTICS:
 1. RATING: 10A 250V~ NORTH AMERICA & EUROPE
 2. INSULATION RESISTANCE: 100 MΩ MIN, AT 500 V DC
 3. ELECTRIC STRENGTH: AC 2,000 V FOR 1 MINUTE
- C: APPROVALS:

UL, CUL, VDE, ENEC, & CCC
- D: DIAGRAM:

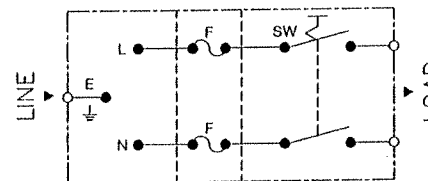

E: ORDERING INFORMATION:

P/N	PANEL THICKNESS	SOCKET'S TERMINAL	SWITCH'S TERMINAL
0717-2SPQ10-A	1.0 mm		
0717-2SPQ12-A	1.2 mm		
0717-2SPQ15-A	1.5 mm		

暫行使用章

		PART NO.: 0717-2SPQXX-A		NAME: AC INLET 3P + SWITCH & 2 FUSE (SNAP-IN)																									
		MATERIAL: SEE ABOVE		SPEC.: IEC 60320-1, C14 IEC 60127-6																									
TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: .000: ±0.1 .00: ±0.2 .0: ±0.3 ANGULAR: ±3°		APPROVED	CHECKED	DESIGNER	NOTE:																								
<table border="1" style="width: 100%;"> <tr> <th>REV</th> <th>DATE</th> <th>DOCUMENT</th> <th>DESCRIPTION</th> </tr> <tr> <td>E</td> <td></td> <td></td> <td></td> </tr> <tr> <td>D</td> <td></td> <td></td> <td></td> </tr> <tr> <td>C</td> <td></td> <td></td> <td></td> </tr> <tr> <td>B</td> <td>2012.07.02</td> <td>DGRXXXXXX</td> <td>CHANGE SAFETY MARK</td> </tr> <tr> <td>A</td> <td>2006.03.20</td> <td>RELEASE</td> <td>NEW REVISION</td> </tr> </table>		REV	DATE	DOCUMENT	DESCRIPTION	E				D				C				B	2012.07.02	DGRXXXXXX	CHANGE SAFETY MARK	A	2006.03.20	RELEASE	NEW REVISION	UNIT: mm	SCALE: 1:1	SHEET: 1 of 1	
REV	DATE	DOCUMENT	DESCRIPTION																										
E																													
D																													
C																													
B	2012.07.02	DGRXXXXXX	CHANGE SAFETY MARK																										
A	2006.03.20	RELEASE	NEW REVISION																										