


8B Series

Sealed Sub-Miniature Pushbutton Switches(SMT)



SPECIFICATIONS

CONTACT RATING: Dependent upon contact material See Page 129..

MECHANICAL LIFE: 50,000 make-and-break cycles.

CONTACT RESISTANCE: 20 m Ω max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 M Ω min.

DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE & BUSHING: Glass filled nylon 6/6, flame retardant,
heat stabilized (UL94v-0).

PLUNGER: Thermoplastic Polyester (UL 94V-0),
with intenal O-ring seal.

SWITCH SUPPORT: Brass, tin plated.

CONTACT / TERMINALS: Silver or gold plated copper alloy.
(See Page 129)

IP 67
ACCORDING TO
EN 60529:1991+A1:2001
(IEC 60529:2001)

UL US
E 187490

RoHS
compliant



8B
Pushbutton Switches

HOW TO ORDER

MODEL NO.

TERMINATIONS

TERMINAL
PLATING

SEAL

RoHS
SOLDERING



Model NO.

8BS8 ON-(ON)
8BS9 OFF-(ON)

Terminations

MT (STD) Right angle, surface mount.
MZ (STD)

Terminal plating

Q Silver
R Gold
C Gold over silver



Seal

E EPOXY (std)

RoHS soldering

S RoHS & Lead Free


SWITCH FUNCTION

NO. POLES	UL/CSA MODEL NO.	MODEL NO.	SWITCH FUNCTION		CONNECTED TERMINALS / SCHEMATIC	
			POS.1	POS.2	POS.1	POS.2
						
SP	Q28B18	8BS8	ON	(ON)	2-1 	2-3 
	Q28B19	8BS9	OFF	(ON)	OPEN	1-3 


()=MOMENTARY

POLE OPTIONS

MT

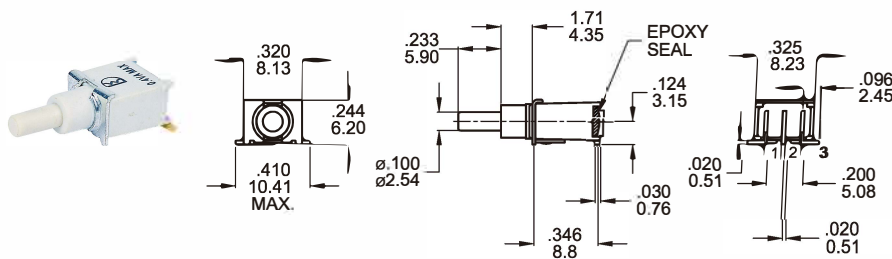


P.C. MOUNTING

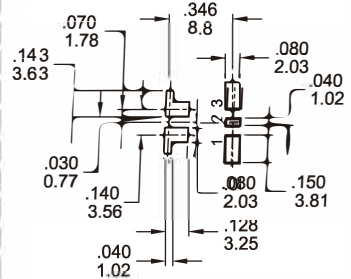


SPDT

Part No. Shown : 8BS8MTRE

MZ

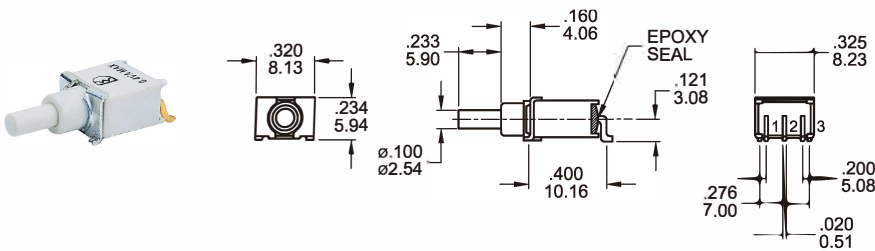


P.C. MOUNTING




SPDT

Part No. Shown : 8BS8MZRE

MT

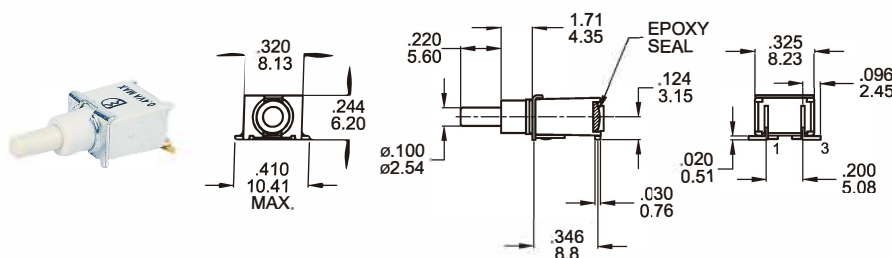

P.C. MOUNTING




SPST

Part No. Shown : 8BS9MTRE



Sealed Sub-Miniature Pushbutton Switches(SMT)

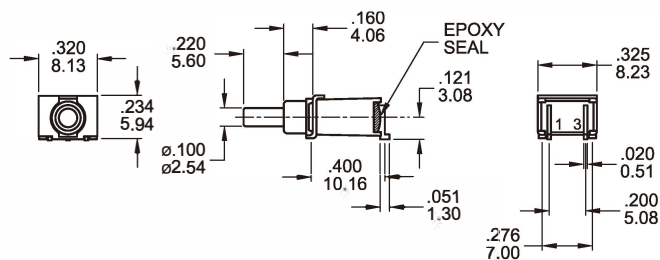


Part No. Shown : 8BS9MZRE



PACKAGING

8B Pushbutton Switches


Tape and cover strip are conductive for use near statically sensitive components.

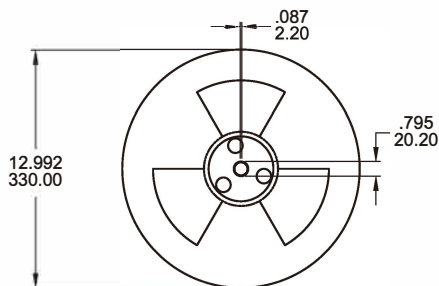

SCALE: 10 : 1

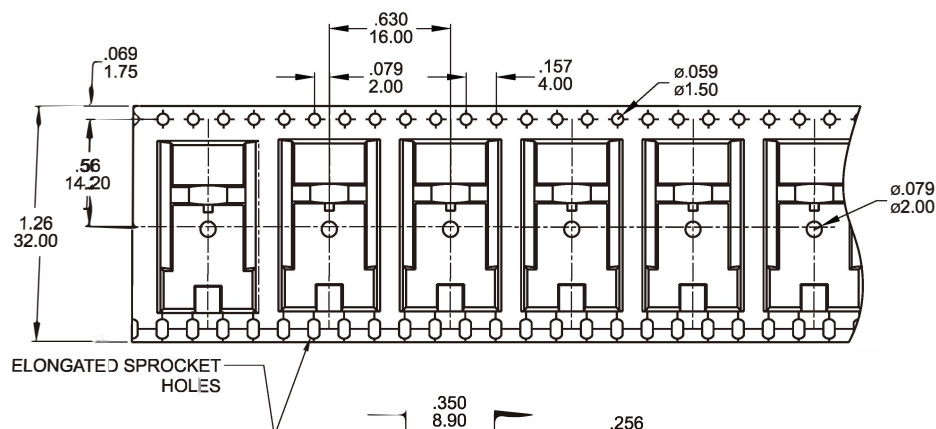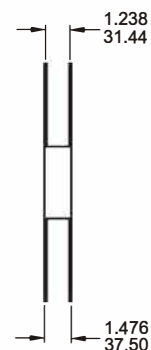

SCALE: 1 : 1

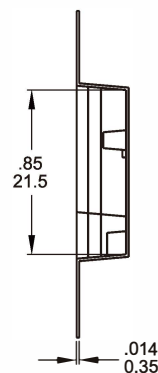

REEL INFORMATION

QUANTITY PER REEL	500 / pcs
-------------------	-----------

CONTACT MATERIAL OPTIONS

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Gold flash over silver	3 Amps with resistant load @ 120VAC or 28VDC 1 Amps with resistant load @ 250VAC
C	Gold over Silver	Gold over silver	
R	Gold	Gold	0.4 Volt - Amps (VA) max. @ 20V max. (AC or DC)

SOLDERING PROCESSES

REFLOW SOLDERING: Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder.

WAVE SOLDERING: Recommended Soldering Temperature: 260 ± 5°C

Duration of Solder Immersion: Max 5 sec. (PCB is 1.6mm in thickness)

SOLDERING: Vapor phase & IR-reflow soldering can be applied.



Temperature Profile

Zone	Room Temperature	Time (Sec)
Pre-heat (A)	150°C	Min 120s
Soak (B)	150°C ~ 200°C	Min 150s
Peak (C)	200°C ~ 235°C	Min 30s
Peak (D)	235°C ~ 260°C	Min 40s
Peak (E)	260°C	Max 5s

