



SPECIFICATIONS

POWER INPUT: DC 5V +/- 0.5V.


TYPE: 3 AXES, X/Y and Z(ROTARY).

OUTPUT: ANALOG DC 0-5V.

OPERATING LIFE: X/Y AXES 5 MILLION CYCLES MIN.
Z AXE 1 MILLION CYCLES MIN.

OPERATING TEMPERATURE: -20°C to 65°C.

CONFIGURATIONS

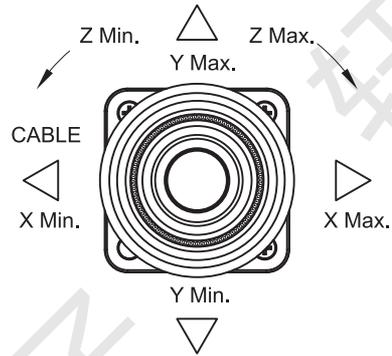






HOW TO ORDER

HJB01-D1

- 1.HJB: 3D, X/Y w/- Z(ROTARY). TYPE.
- 2.HJA: 2D, X/Y. Option code.

Part No. Shown : HJB01-D1

PANEL MOUNTING

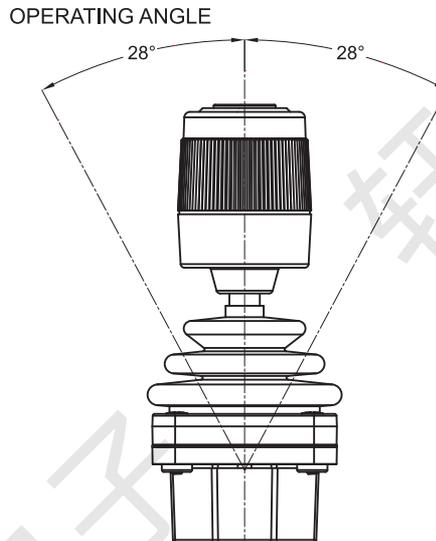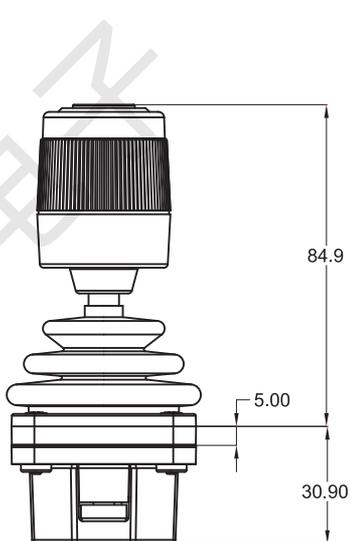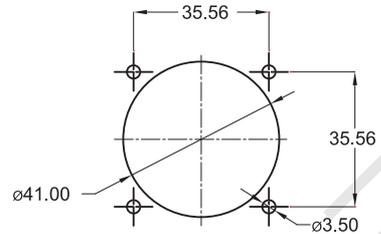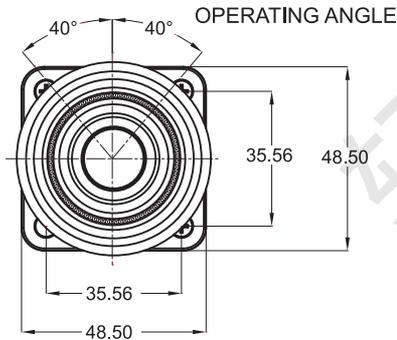

Application Diagram



HJB
Hall-effect Joystick