

TCD

FEATURES

- ※ Compact-sized
- ※ Side actuated
- ※ Sealed with dust proof
- ※ PCB-base structure

APPLICATION


- ※ Smart phone
- ※ Digital Camera, Medical
- ※ Portable electronic device

SPECIFICATION


| | |
|-----------------------|--------------------|
| Contact Rating | 50mA, 12V DC |
| Contact Resistance | 100mΩ max |
| Insulation Resistance | 100MΩ min. 100V DC |
| Dielectric Strength | 250V AC/1 minute |
| Operating Force | 160±50gf |
| Travel | 0.2mm |
| Operating Life | 100,000 cycles |
| Operating Temp. | -40 °C ~ +85 °C |
| Storage Temp. | -40 °C ~ +85 °C |

HOW TO ORDER

TCD-C2KQR

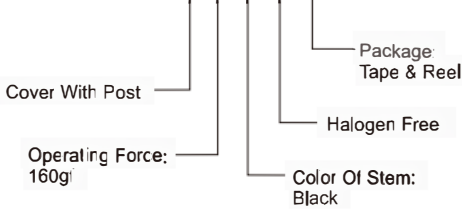

CIRCUIT



PACKAGE

<Tape & Reel>
3000 pcs

TACLEX

TACT SWITCH

TCD

