

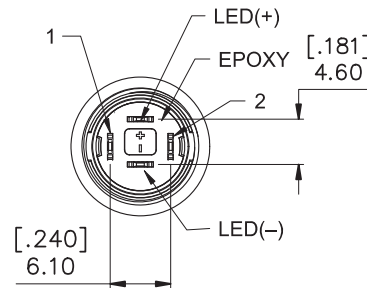


僅供參考

Funtion	POS.1	POS.2
	OFF	ON(LOCK)
Term. Comm.		

SWITCH FUNCTION


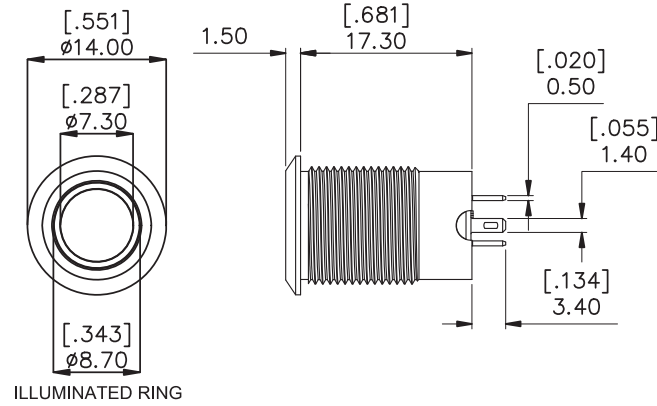


SPECIFICATIONS


- 1.RATING: 2A/250VAC, 2A/36VDC
- 2.ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- 3.MECHANICAL LIFE: 500,000. CYCLES
- 4.INSULATION RESISTANCE:1,000 MΩ MIN AT 500VDC
- 5.DIELECTRIC STRENGTH: 1,000V RMS@SEA LEVEL
- 6.CONTACT RESISTANCE: 50MΩ MAX.@1A 12VDC(initial value)
- 7.OPERATING TEMPERATURE: -20°C to 55°C
- 8.TRAVEL: ABOUT 2.8mm
- 9.OPERATION PRESSURE: 3.0N±1.5N
- 10.INGRESS PROTECTION: IP67
- 11.TORQUE: 0.3~0.5Nm. APPLY TO NUTS
- 12.CURRENT LIMITING RESISTOR IS REQUIRED TO LIMIT LED FORWARD CURRENT TO 20 mA.

MATERIAL:

BUSHING: STAINLESS STEEL
 BASE: PA66
 ACTUATOR: STAINLESS STEEL
 INNER ASSEMBLY: PA66
 SPRING: STAINLESS STEEL
 SEALING: SILICONE
 TERMINAL: BRASS, GOLD OVER SILVER PLATING
 CONTACT: BRASS,COINT SILVER WITH GOLD PLATING
 HEX NUT: BRASS,NICKEL PLATING
 O-Ring: SILICONE

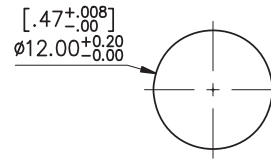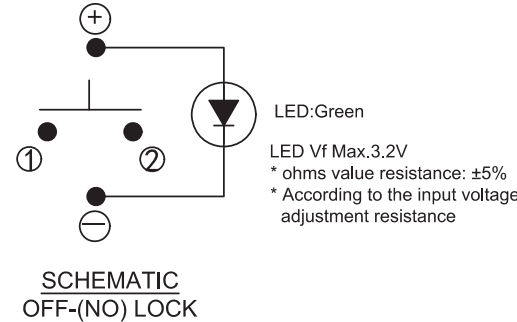

PANEL CUTOUT
THICKNESS:8.0mm(Max.)

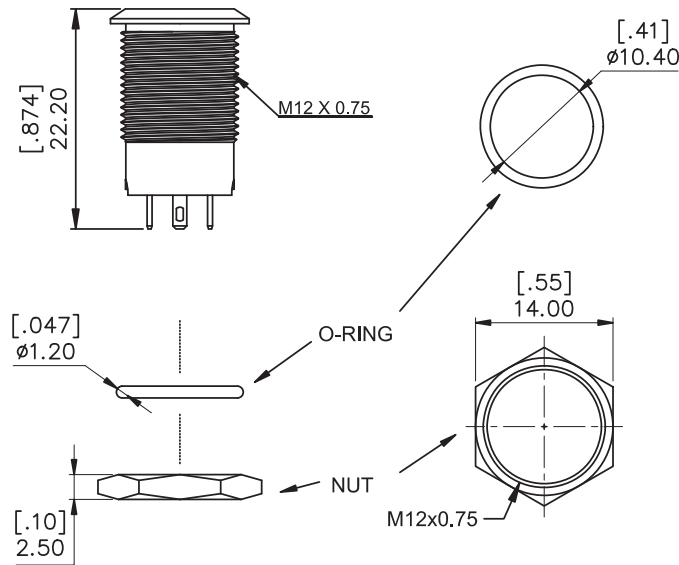

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 2:1 	TITLE 圖 名	Lock Metal push button switch Ø12			SIZE 圖紙	A4		
1	Ⓐ					TOLERANCE (公差) : 0.00mm±0.25mm 0.0mm±0.40mm ANGULAR: ±5° FILE NAME : TEST-4044	DWG NO. 圖 號	TEST-4044			UNIT 單位	mm	
2	Ⓑ						REV. 版 本	R01	DATE 日期	JUL - 29 - 2025		SHEET 張 數	1 of 1
3	Ⓒ						APPROVE 審 核		CHECK 確 認		DRAW 製 圖	CONNIE	
4	Ⓓ												
5	Ⓔ												